



# LR6-60HPH 300~320M

Hi-MO 3m

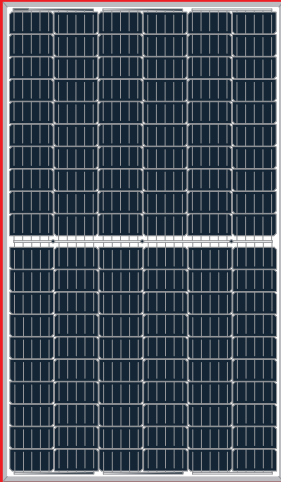

**High Efficiency  
Low LID Mono PERC with  
Half-cut Technology**

10-year Warranty for Materials and Processing;  
25-year Warranty for Extra Linear Power Output

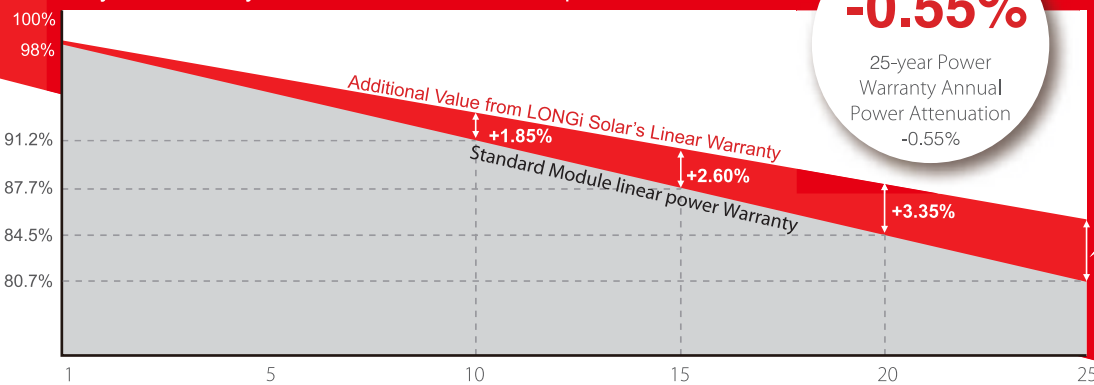

**-0.55%**

25-year Power  
Warranty Annual  
Power Attenuation  
-0.55%

**+4.10%**

## Complete System and Product Certifications

IEC 61215, IEC61730

ISO 9001:2008: ISO Quality Management System

ISO 14001:2004: ISO Environment Management System

TS62941: Guideline for module design qualification and type approval

OHSAS 18001: 2007 Occupational Health and Safety



\* Specifications subject to technical changes and tests. LONGi Solar reserves the right of interpretation.

**Positive power tolerance** (0 ~ +5W) guaranteed

**High module conversion efficiency** (up to 19.3%)

**Slower power degradation** enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

**Solid PID resistance** ensured by solar cell process optimization and careful module BOM selection

**Reduced resistive loss** with lower operating current

**Higher energy yield** with lower operating temperature

**Reduced hot spot risk** with optimized electrical design and lower operating current

# LONGi Solar

Room 801, Tower 3, Lujiazui Financial Plaza, No.826 Century Avenue, Pudong Shanghai, 200120, China  
Tel: +86-21-80162606 E-mail: module@longi-silicon.com Facebook: www.facebook.com/LONGi Solar


Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

# LR6-60HPH 300~320M

## Design (mm)

## Mechanical Parameters

## Operating Parameters

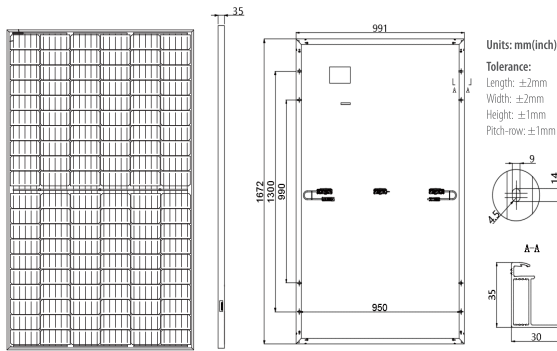

Units: mm(Inch)  
Tolerance:  
Length:  $\pm 2$ mm  
Width:  $\pm 2$ mm  
Height:  $\pm 1$ mm  
Pitch-row:  $\pm 1$ mm

Cell Orientation: 120 (6x20)  
Junction Box: IP67, three diodes  
Output Cable: 4mm<sup>2</sup>, 300mm in length  
Glass: Single glass  
2.8mm coated tempered glass  
Frame: Anodized aluminum alloy frame  
Weight: 16.8kg  
Dimension: 1672x991x35mm  
Packaging: 30pcs per pallet  
180pcs per 20'GP  
780pcs per 40'HC

Operational Temperature: -40 C ~ +85 C  
Power Output Tolerance: 0 ~ +5 W  
Voc and Isc Tolerance:  $\pm 3\%$   
Maximum System Voltage: DC1500V (IEC)  
Maximum Series Fuse Rating: 20A  
Nominal Operating Cell Temperature: 45 $\pm 2$  C  
Safety Class: Class II

## Electrical Characteristics

Test uncertainty for Pmax:  $\pm 3\%$

Model Number	LR6-60HPH-300M		LR6-60HPH-305M		LR6-60HPH-310M		LR6-60HPH-315M		LR6-60HPH-320M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	300	222.2	305	225.9	310	229.6	315	233.4	320	237.1
Open Circuit Voltage (Voc/V)	39.8	37.1	40.1	37.4	40.3	37.7	40.6	37.9	40.9	38.2
Short Circuit Current (Isc/A)	9.70	7.82	9.78	7.88	9.86	7.94	9.94	8.01	10.02	8.08
Voltage at Maximum Power (Vmp/V)	32.9	30.4	33.1	30.6	33.3	30.8	33.7	31.1	33.9	31.3
Current at Maximum Power (Imp/A)	9.13	7.32	9.21	7.38	9.30	7.46	9.36	7.50	9.43	7.56
Module Efficiency(%)	18.1		18.4		18.7		19.0		19.3	

STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20 C, Spectra at AM1.5, Wind at 1m/s

## Temperature Ratings ( STC )


Temperature Coefficient of Isc	+0.057%/C
Temperature Coefficient of Voc	-0.286%/C
Temperature Coefficient of Pmax	-0.370%/C

## Mechanical Loading


Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

## I-V Curve


Current-Voltage Curve (LR6-60HPH-310M)



Power-Voltage Curve (LR6-60HPH-310M)



Current-Voltage Curve (LR6-60HPH-310M)



# LONGI Solar

Room 801, Tower 3, Lujiazui Financial Plaza, No.826 Century Avenue, Pudong Shanghai, 200120, China  
Tel: +86-21-80162606 E-mail: module@longi-silicon.com Facebook: www.facebook.com/LONGI Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGI Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.