



# LR6-72BP 355~375M

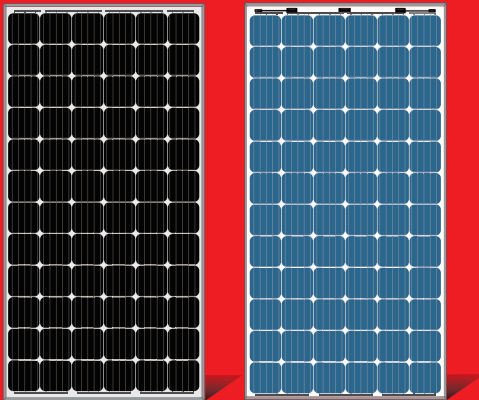

**Hi-MO2 High Efficiency Low  
LID Bifacial PERC Technology  
Best Solution for Lower LCOE**

10-year Warranty for Materials and Processing;  
30-year Warranty for Extra Linear Power Output

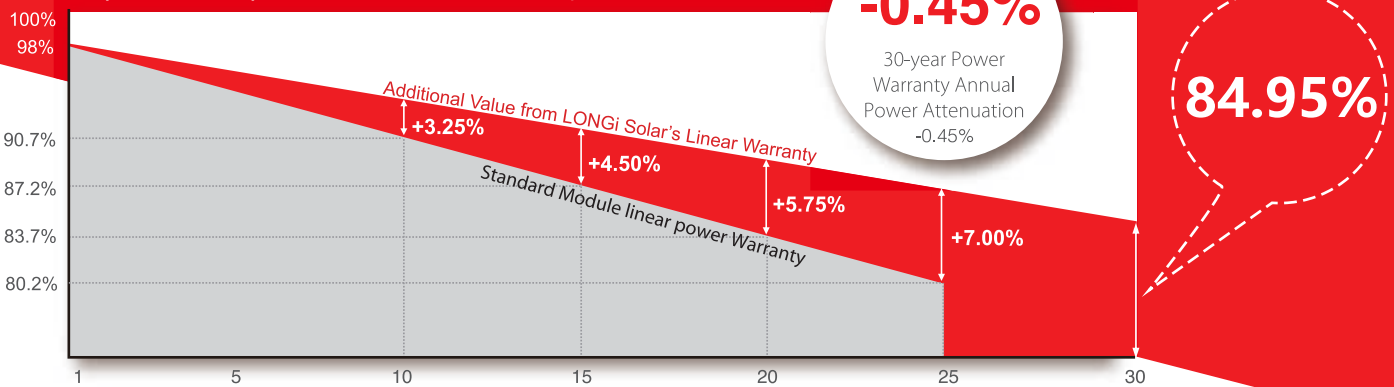

## Complete System and Product Certifications

IEC 61215, IEC61730, UL1703  
ISO 9001:2008: ISO Quality Management System  
ISO 14001: 2004: ISO Environment Management System  
TS62941: Guideline for module design qualification and type approval  
OHSAS 18001: 2007 Occupational Health and Safety



\* Specifications subject to technical changes and tests. LONGi Solar reserves the right of interpretation.

## Front side performance equivalent to conventional low LID mono PERC:

- High module conversion efficiency (up to 19.0%)
- Better energy yield with excellent low irradiance performance and temperature coefficient
- First year power degradation <2%

**Bifacial technology** enables additional energy harvesting from rear side (up to 25%)

**Glass/glass lamination** ensures 30 year product lifetime, with annual power degradation < 0.45%, 1500V compatible to reduce BOS cost

**40mm frame design** enables easy installation and robust mechanical strength

**Solid PID resistance** ensured by solar cell process optimization and careful module BOM selection


# LONGi Solar

Room 201, Building 8, Sandhill Plaza, Lane 2290, Zuchongzhi Road, Pudong District, Shanghai, 201203  
Tel: + 86-21-61047332 Fax: +86-21-61047377 E-mail: module@longi-silicon.com  
Facebook: www.facebook.com/LONGi Solar


Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

# LR6-72BP 355~375M

## Design (mm)

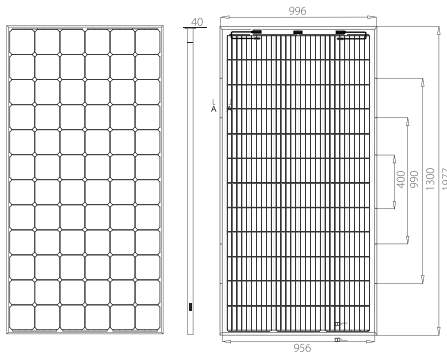

Units: mm  
Tolerance:  
Length: ±2mm  
Width: ±2mm  
Height: ±1mm  
Pitch-row: ±1mm



## Mechanical Parameters

Cell Orientation: 72 (6×12)  
Junction Box: IP67, three diodes  
Output Cable: 4mm<sup>2</sup>, 300mm in length,  
length can be customized  
Weight: 26.5kg  
Dimension: 1977×996×40mm  
Packaging: 26pcs per pallet

## Operating Parameters

Operational Temperature: -40 C ~ +85 C  
Power Output Tolerance: 0 ~ +5 W  
Voc and Isc Tolerance: ±3%  
Maximum System Voltage: DC1500V (IEC&UL)  
Maximum Series Fuse Rating: 20A  
Nominal Operating Cell Temperature: 45±2 C  
Application Class: Class II  
Bifaciality: ≥75%

## Electrical Characteristics

Test uncertainty for Pmax: ±3%

Model Number	LR6-72BP-355M		LR6-72BP-360M		LR6-72BP-365M		LR6-72BP-370M		LR6-72BP-375M	
	Front	Back	Front	Back	Front	Back	Front	Back	Front	Back
Maximum Power (Pmax/W)	355	267	360	270	365	274	370	278	375	282
Open Circuit Voltage (Voc/V)	48.1	47.8	48.2	47.9	48.3	48.0	48.4	48.1	48.6	48.3
Short Circuit Current (Isc/A)	9.61	7.26	9.72	7.33	9.84	7.42	9.95	7.52	10.03	7.58
Voltage at Maximum Power (Vmp/V)	39.2	39.7	39.3	39.8	39.5	40.0	39.6	40.1	39.8	40.2
Current at Maximum Power (Imp/A)	9.06	6.73	9.16	6.79	9.25	6.86	9.35	6.94	9.43	7.01
Module Efficiency(%)	18.0	13.6	18.3	13.7	18.5	13.9	18.8	14.1	19.0	14.3

STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 C, Spectra at AM1.5

Electrical characteristics with different rear side power gain (reference to 365W front)

Pmax /W	Voc/V	Isc /A	Vmp/V	Imp /A	Pmax gain
383	48.3	10.33	39.5	9.71	5%
402	48.3	10.82	39.5	10.18	10%
420	48.4	11.31	39.4	10.64	15%
438	48.4	11.80	39.4	11.10	20%
456	48.4	12.29	39.4	11.56	25%

## Temperature Ratings ( STC )


Temperature Coefficient of Isc: +0.060%/ C  
Temperature Coefficient of Voc: -0.300%/ C  
Temperature Coefficient of Pmax: -0.370%/ C

## Mechanical Loading


Front Side Maximum Static Loading: 5400Pa  
Rear Side Maximum Static Loading: 2400Pa  
Hailstone Test: 25mm Hailstone at the speed of 23m/s

## I-V Curve


Current-Voltage Curve (LR6-72BP-365M)

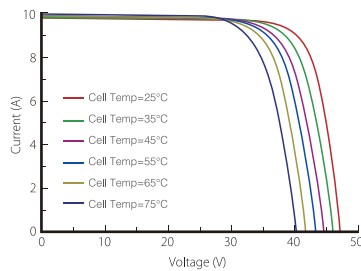

Power-Voltage Curve (LR6-72BP-365M)

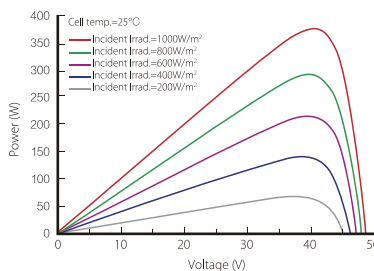

Current-Voltage Curve (LR6-72BP-365M)

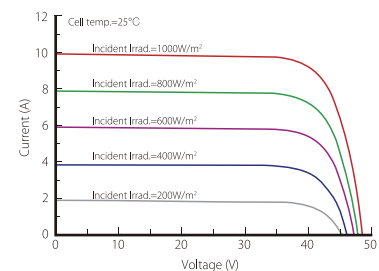

# LONGi Solar

Room 201, Building 8, Sandhill Plaza, Lane 2290, Zuchongzhi Road, Pudong District, Shanghai, 201203  
Tel: + 86-21-61047332 Fax: +86-21-61047377 E-mail: module@longi-silicon.com  
Facebook: www.facebook.com/LONGi Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.