



### Simple

- Straightforward, plug-and-play commissioning
- Other SMA devices are not required

### Communicative

- Free online monitoring via Sunny Portal
- Clear display of the most important plant data with Sunny Portal

### Direct

- Data exchange with Sunny Portal without data logger
- Free Sunny Portal app for data visualization on smartphones

### Economical

- Reasonable investment costs and low installation effort
- Most favorable way of plant monitoring

## WEBCONNECT

### Direct data exchange with Sunny Portal

Webconnect is ideally suited for online monitoring of small PV plants with up to four inverters. It provides free access to Sunny Portal with existing Internet access and a DSL router, without an additional data logger. Webconnect commissioning is plug and play after the simple installation of the inverter interface, which is optionally available or integrated at the factory. Once configured, key plant data can be accessed and displayed in a clear format whenever needed via Sunny Portal and automatic product updates ensure that the device firmware is always up to date.



Optional Webconnect interface of data module<sup>1</sup> or Piggy-Back<sup>2</sup> type



SB 240-US-10 and Sunny Multigate-US-10 with integrated Webconnect functionality




STP 12000TL-US-10 / 15000TL-US-10 / 20000TL-US-10 / 24000TL-US-10 with integrated Webconnect functionality

<sup>1</sup> Supported inverters: SB 3000TL-US-22 / 4000TL-22 / 5000TL-US-22

<sup>2</sup> Supported inverters: SB 3000US-12 / 3800US-12 / 4000US-12, SB 5000US / 5000US-11 / 5000US-12 / 6000US / 6000US-11 / 6000US-12 / 6000TLUS-12 / 7000US / 7000US-11 / 7000US-12 / 7000TLUS-12 / 8000US-11 / 8000TLUS-11 / 8000US-12 / 8000TLUS-12 / 9000TLUS-10 / 9000TLUS-12 / 10000TLUS-10 / 10000TLUS-12 / 11000TLUS-12

Technical data	Inverter with Webconnect functionality	Micro inverter with Webconnect functionality
<b>Communication</b>		
Sunny Portal	SMA Webconnect via Ethernet	
<b>Connections</b>		
Ethernet	RJ45	
<b>Max. radio range</b>		
Ethernet	100 m	
<b>Supported Sunny Portal functions</b>		
Online device updates	●	
<b>Plant and device information</b>		
Live data	●	●
Panel Level Monitoring	–	●
Plant description	Overview of the key properties of the PV plant	
Annual comparison	Quick yield overview of the entire operating period	
System logbook	Access to messages regarding plant events	
Device Overview	Properties and parameters of the devices in the PV plant	
Status reports	E-mail reports provide regular information on plant yields and plant events	
Data management	Data consolidation after two years	
<b>Monitoring</b>		
Inverter comparison	Fully automatic and continuous yield comparison and e-mail alarms	
Communication monitoring	Ongoing monitoring of the connection between Sunny Portal and the PV plant	
<b>Individual access</b>		
Publication of specific pages	Access via the public area on Sunny Portal by all Internet users, ideal for personalized presentations on personal websites	
User roles	By assigning the roles of "guest", "standard user", "installer" and "plant administrator", you can determine viewing and configuration rights of the different roles.	
<b>Access</b>		
Website	www.sunnyportal.com	
Smartphone	www.sunnyportal.mobi, Sunny Portal App for iPhone and Android	
● Standard feature ○ Optional feature – Not available		

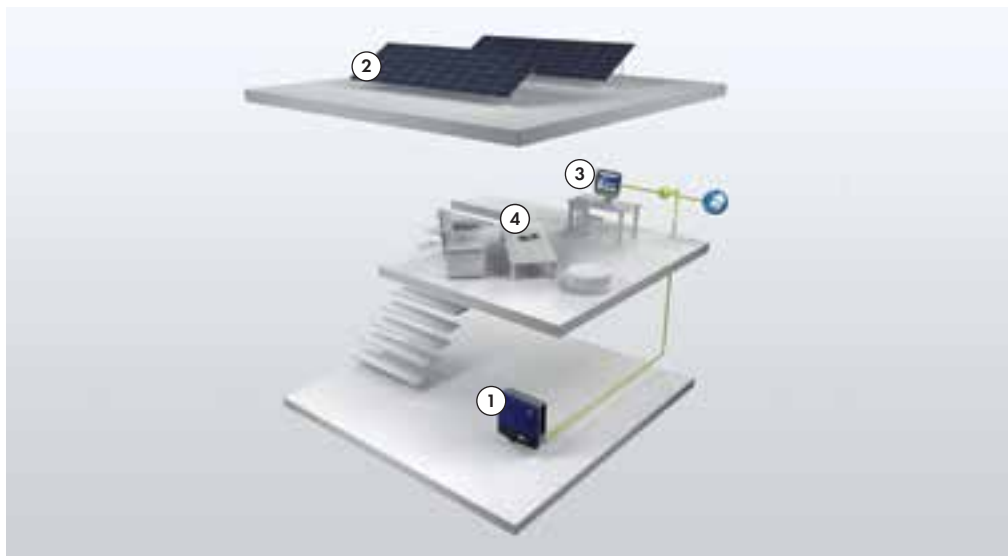

## Typical plant design

### Power generation

- ① e.g. Sunny Tripower TL-US with Webconnect data module
- ② PV array

### Plant monitoring

- ③ Sunny Explorer  
Sunny Portal
- ④ Mobile access

WEBCONNECT-DUS 140313 SMA and Sunny Boy are registered trademarks of SMA Solar Technology AG. Printed on FSC-certified paper. All products and services described as well as technical data are subject to change, even for reasons of country-specific deviations, at any time without notice. SMA assumes no liability for errors or omissions. For current information, see www.SMA.Solar.com.