



N-TYPE MODULE

PRODUCT: TSM-NE09RC.05

PRODUCT RANGE: 400W -425W

425W


MAXIMUM POWER OUTPUT

0~+5W

POSITIVE POWER TOLERANCE

21.3%

MAXIMUM EFFICIENCY

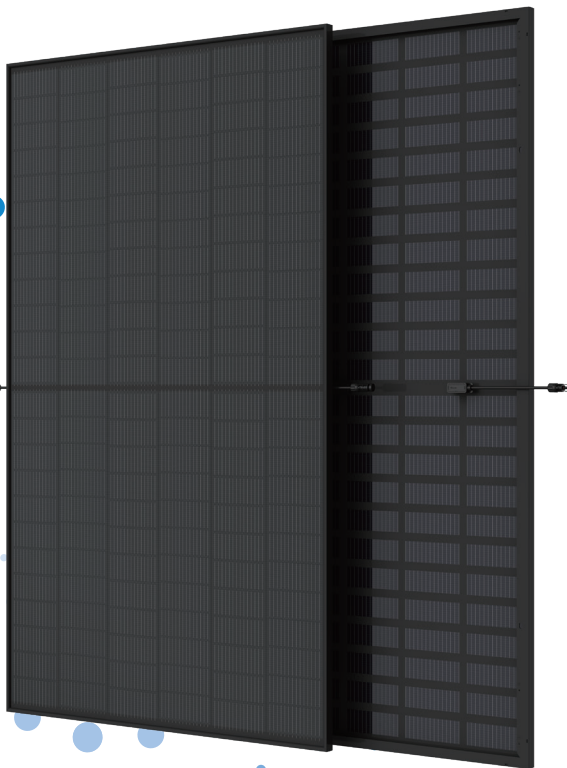

**Smaller panel, Bigger power generation**

- Up to 425W, 21.3% module efficiency.
- Reduce installation cost with higher module power on the roof.
- Boost performance in warm weather with lower temperature coefficient



**High Reliability**

- Innovative non-destructive cell cutting technology for improved mechanical resistance and strength



**Lower Degradation, longer warranty, higher output**


- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 25 years power warranty



**Universal solution for residential and C&I rooftops**

- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Most valuable solution on low load capacity rooftops
- Mechanical performance up to 6000 Pa positive load and 4000 Pa negative load

**Trina Solar's Vertex Bifacial Dual Glass Performance Warranty**

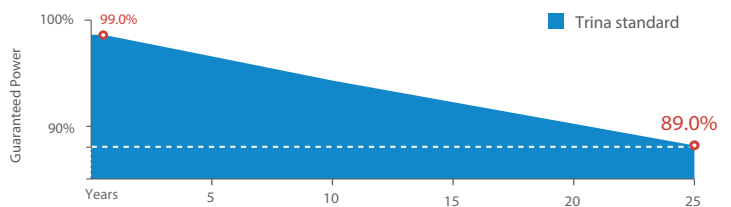


Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716/UL61730  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System




### DIMENSIONS OF PV MODULE(mm)

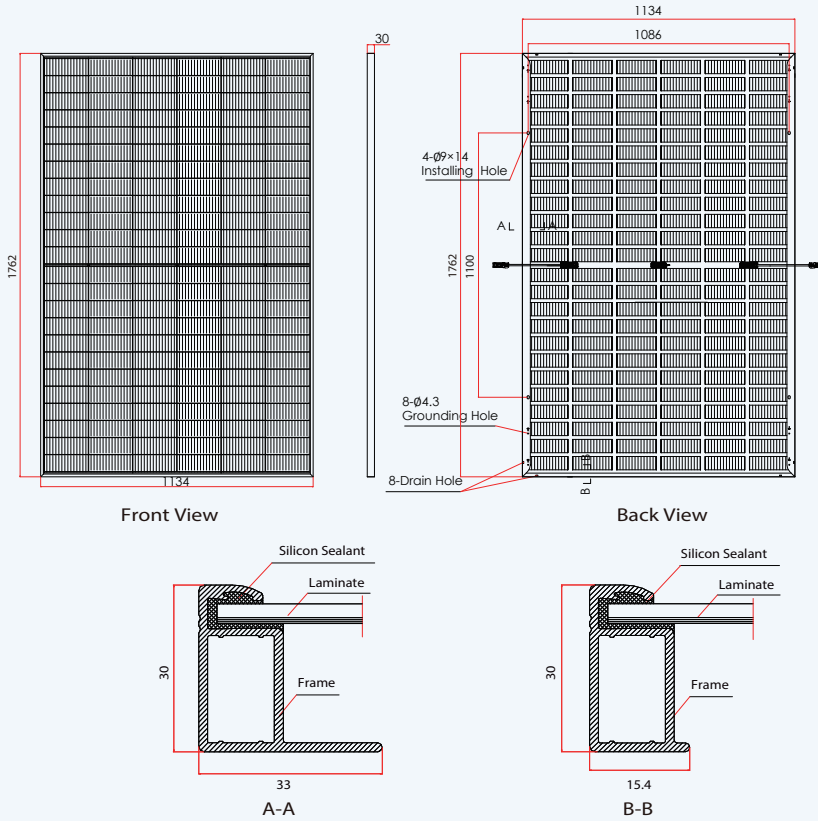

### I-V CURVES OF PV MODULE(420 W)

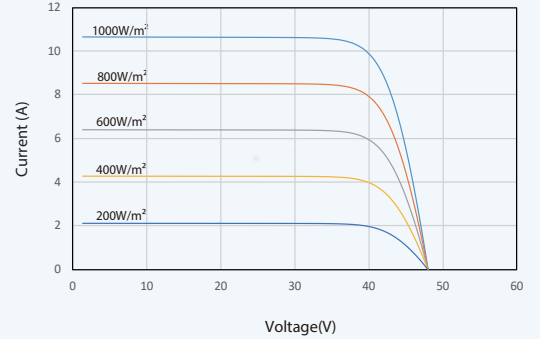

### P-V CURVES OF PV MODULE(420W)

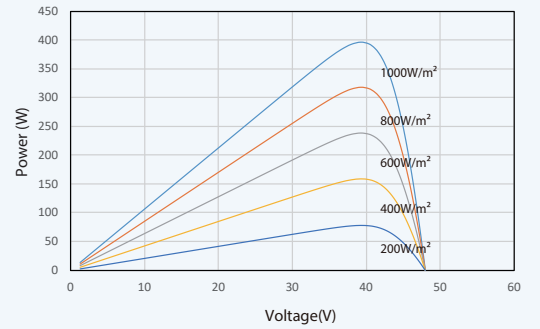

### ELECTRICAL DATA (STC)

Peak Power Watts-P <sub>MAX</sub> (Wp)*	400	405	410	415	420	425
Power Tolerance-P <sub>MAX</sub> (W)	0 ~ +5					
Maximum Power Voltage-V <sub>MPP</sub> (V)	41.3	41.7	42.1	42.5	42.8	43.2
Maximum Power Current-I <sub>MPP</sub> (A)	9.68	9.71	9.73	9.77	9.80	9.84
Open Circuit Voltage-V <sub>OC</sub> (V)	49.2	49.6	50.1	50.5	50.9	51.4
Short Circuit Current-I <sub>SC</sub> (A)	10.30	10.33	10.37	10.40	10.43	10.47
Module Efficiency η <sub>m</sub> (%)	20.0	20.3	20.5	20.8	21.0	21.3

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance: ±3%.

### Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Total Equivalent power -P <sub>MAX</sub> (Wp)	426	431	437	442	447	453
Maximum Power Voltage-V <sub>MPP</sub> (V)	41.3	41.7	42.1	42.5	42.8	43.2
Maximum Power Current-I <sub>MPP</sub> (A)	10.31	10.34	10.36	10.41	10.44	10.48
Open Circuit Voltage-V <sub>OC</sub> (V)	49.2	49.6	50.1	50.5	50.9	51.4
Short Circuit Current-I <sub>SC</sub> (A)	10.97	11.00	11.04	11.08	11.11	11.15
Irradiance ratio (rear/front)	10%					

Power Bifaciality: 65±10%.

### ELECTRICAL DATA (NOCT)

Maximum Power-P <sub>MAX</sub> (Wp)	302	308	312	316	319	324
Maximum Power Voltage-V <sub>MPP</sub> (V)	38.6	39.0	39.3	39.7	40.0	40.4
Maximum Power Current-I <sub>MPP</sub> (A)	7.88	7.91	7.93	7.96	7.98	8.01
Open Circuit Voltage-V <sub>OC</sub> (V)	46.6	47.0	47.5	47.8	48.2	48.7
Short Circuit Current-I <sub>SC</sub> (A)	8.30	8.32	8.36	8.38	8.41	8.44

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

### MECHANICAL DATA

Solar Cells	Topcon Bifacial
No. of cells	144cells
Module Dimensions	1762×1134×30 mm (69.37×44.65×1.18 inches)
Weight	21.8kg (48.06 lb)
Front Glass	3.2 mm (0.12inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
BackSheet	Black Grid Transparent Backsheet
Frame	30mm (1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), Landscape: N 1100 mm /P 1100 mm (43.31/43.31 inches)
Connector	MC4 Evo2
Fire Type	Type 1 or Type 2

### TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P <sub>MAX</sub>	- 0.30%/°C
Temperature Coefficient of V <sub>OC</sub>	- 0.25%/°C
Temperature Coefficient of I <sub>SC</sub>	0.04%/°C

### MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	20A

### WARRANTY

- 25 year Product Workmanship Warranty
- 25 year Power Warranty
- 1% first year degradation
- 0.4% Annual Power Attenuation

(Please refer to product warranty for details)

### PACKAGING CONFIGURATION

- Modules per box: 36 pieces
- Modules per 40' container: 792 pieces